02.08.22 windhamfabrics.com



FREE PROJECT

Safari Sighting

Throw Quilt & Pillow

designed by Natalie Crabtree

featuring Savanna Sunrise and Spectrum by Whistler Studios

QUILT SIZE: 58" x 68" PILLOW SIZE: 22" x 22"



PLEASE NOTE: BEFORE MAKING YOUR PROJECT, CHECK FOR ANY PATTERN UPDATES AT WINDHAMFABRICS.COM FREE PROJECTS SECTION.



e: info@windhamfabrics.com p: 201-659-0444 • f: 201-659-9719



CUTTING INSTRUCTIONS:

(Cutting Instructions for both the throw quilt and pillow are included below for **Fabrics A-G**. Label the cut pieces for the throw or pillow as indicated. If you are completing (1) project, but not the other, simply complete only the cutting instructions required for your project.)

KEY	FABRIC	SKU	YD	CUTTING INSTRUCTIONS
Α		SPECTRUM 52782-2 Sand	1 1/4	(6) 2" x WOF strips. Piece strips for length using diagonal seams. From the long strip, subcut the following for the throw quilt: (2) 2" x 60 ½" Side Inner Borders. (2) 2" x 53 ½" Top/Bottom Inner Borders. (7) 3" x WOF strips. Subcut the following for the throw quilt: First, cut (12) 3" x 15 ½" horizontal sashing strips. From remainder of strips cut (10) 3" x 10 ½" vertical sashing strips. Cut (2) 1 ½" x WOF strips. Subcut the following for pillow assembly: First, cut (2) 1 ½" x 22 ½" strips. From the remainder of the strips cut (2) 1 ½" x 10 ½" rectangles and (4) 1 ½" x 3" rectangles. Cut (2) 1 ¾" x WOF strips. Subcut (2) 1 ¾" x 22 ½" strips for pillow assembly.
В		SPECTRUM 52782-3 Wheat	1	 (8) 3 ½" x WOF strips. Subcut (96) 3 ½" squares for throw quilt assembly. (1) 3 ½" x WOF strip. Subcut (12) 3 ½" squares for pillow assembly.
С		SPECTRUM 52782-36 Ruby INCLUDES QUILT AND PILLOW BINDING	1 1/8	 (2) 3 ½" x WOF strips. Subcut the following: (16) 3 ½" squares for throw quilt assembly. (4) 3 ½" squares for pillow assembly. (1) 3" x WOF strip. Subcut (8) 3" squares for throw quilt assembly. BINDING FOR THROW QUILT: (7) 2 ½" x WOF strips for throw quilt binding. BINDING FOR PILLOW: (3) 2 ½" x WOF strips for pillow binding.
D		52985DP-1	2 Panels	From both panels, cut out (7) animal panel images measuring 15 ½" x 10 ½" unfinished. Shown in the throw quilt image are (2) Lion Panels, (2) Elephant Panels, (2) Zebra Panels and (1) Cheetah Panel. From the remainder of the panels, cut out (1) animal panel measuring 15 ½" x 10 ½" unfinished for the pillow.



E	32742C-5 Sunrise	1/2	(3) 3 ½" x WOF strips. Subcut the following: (32) 3 ½" squares for throw quilt assembly. (4) 3 ½" squares for pillow assembly.
F	52986-2 Red	1	(7) 3" x WOF strips. Piece strips for length using diagonal seams. From the long strip, subcut the following for the throw quilt: (2) 3" x 63 ½" Side Outer Borders. (2) 3" x 58 ½" Top/Bottom Outer Borders. (2) 3 ½" x WOF strips. Subcut the following: (16) 3 ½" squares for throw quilt assembly. (4) 3 ½" squares for pillow assembly. (2) 1 ¾" x WOF strips. Trim both strips to measure 1 ¾" x 22 ½" for pillow assembly.
G	52986-3 Green	1/2	(3) 3 ½" x WOF strips. Subcut (32) 3 ½" squares for throw quilt assembly.
Throw Qu	uilt Backing	3 ¾	Batting 66" x 76"
Pillow	Backing	1	Batting 26 ½" x 26 ½", Pillow Form 22" x 22"

WOF = WIDTH OF FABRIC, HST = HALF SQUARE TRIANGLE, RST = RIGHT SIDES TOGETHER


PROJECT DISCLAIMER: Every effort has been made to ensure that all projects are error free. All the information is presented in good faith, however, no warranty can be given nor results guaranteed. Therefore, we assume no responsibility nor damages that may occur when referring to this pattern. When errors are brought to our attention, we make every effort to correct and post a revision as soon as possible. We suggest you check **windhamfabrics.com** for pattern updates and to test the pattern prior to making the project. Test templates first, before cutting all the pieces. Free projects are not for resale.



PIECING INSTRUCTIONS

THROW QUILT BLOCK ASSEMBLY:

- 1. Draw a diagonal line on the wrong side of (96) 3 ½" Fabric B squares.
- 2. Place (1) Fabric B square with each of (16) 3 ½" Fabric C squares, (32) 3 ½" Fabric E squares, (16) 3 ½" Fabric F squares and (32) 3 ½" Fabric G squares, RST and edges aligned.
- 3. Sew a ¼" away from either side of the drawn diagonal line on each set of squares.
- **4.** Cut along the drawn diagonal line on each set of squares separating the (2) sides, and creating a total of (192) HST units varying in fabric combinations.
- **5.** Trim each HST unit to measure 3" x 3" unfinished. There should be (32) **B/C** HST units, (64) **B/E** HST units, (32) **B/F** HST units and (64) **B/G** HST units.

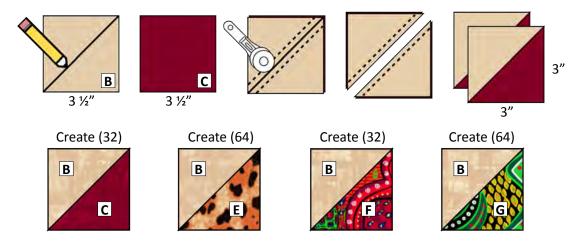

- **6.** Arrange (4) **B/C** HST units, (8) **B/E** HST units, (4) **B/F** HST units and (8) **B/G** HST units to form a block. Please note the location and orientation of each HST unit colorway.
- **7.** Sew the block together as shown in the diagram. Alternate the direction in which you press the HST units in each row. Once complete, the block should measure $15 \frac{1}{2}$ x $10 \frac{1}{2}$ unfinished.
- 8. Repeat to create (8) identical blocks.



THROW QUILT TOP ASSEMBLY:

9. Arrange the blocks created in Steps 6-8 and (7) 15 ½" x 10 ½" **Fabric D** animal panels in a 3 x 5 grid. Alternate between blocks and panel images. Please note the location of each animal panel within the quilt. Place (1) 3" x 10 ½" **Fabric A** sashing strip vertically in between each block/panel.



- **10.** Arrange sashing rows containing (3) 3" x 15 ½" **Fabric A** sashing strips and (2) 3" **Fabric C** squares each. Place sashing rows between each block/panel row.
- **11.** Sew block/panel rows together, pressing seams toward the sashing strips.
- 12. Sew sashing rows together, pressing seams toward the sashing strips.
- **13.** Sew block/panel and sashing rows together to complete the quilt top center. The quilt top center should measure 50 %" x 60 %" unfinished.
- **14.** Attach (1) 2" x 60 ½" **Fabric A** Side Inner Border strip to either side of the quilt top center. Press outward. Then, attach (1) 2" x 53 ½" **Fabric A** Top/Bottom Inner Border strip to the top and bottom of the quilt top center. Press outward.
- **15.** Attach (1) 3" x 63 ½" **Fabric F** Side Outer Border strip to either side of the quilt top center. Press outward. Then, attach (1) 3" x 58 ½" **Fabric F** Top/Bottom Outer Border strip to the top and bottom of the quilt top center. Press outward to complete quilt top assembly. The quilt top should measure 58 ½" x 68 ½" unfinished.




FINISHING THE QUILT:


- 16. Layer the quilt top with batting and backing. Baste quilt layers together.
- 17. Quilt as desired.
- 18. Bind quilt using (7) 2 1/4" x WOF Fabric C strips. Enjoy!




PILLOW BLOCK ASSEMBLY:

- 1. Draw a diagonal line on the wrong side of (12) 3 ½" Fabric B squares. Gather (4) 3 ½" Fabric C squares, (4) 3 ½" Fabric F squares.
- 2. Repeat HST unit assembly instructions described in the throw quilt block instructions to create (8) B/C HST units, (8) B/E HST units and (8) B/F HST units. Trim all HST units to measure 3" x 3" unfinished.







- **3.** Arrange (1) 15 ½" x 10 ½" **Fabric D** animal panel, all HST units prepared in Step 2 above, assorted **Fabric A** strips varying in size and (2) 1 ¾" x 22 ½" **Fabric F** strips to form the pillow front as shown. Reference diagrams for **Fabric A** strip sizing and placement.
- **4.** Sew the pillow front together, pressing away from the panel and HST units. Once complete, the pillow front should measure $22 \frac{1}{2}$ " x $22 \frac{1}{2}$ " unfinished.



PILLOW ASSEMBLY:

- **5.** Layer and sandwich the pillow front with a piece of batting measuring approximately 26 %" x 26 %", and a plain piece of fabric measuring approximately 26 %" x 26 %". The fabric piece will be hidden inside the pillow once complete. Baste the layers using the same methods as a large quilt.
- 6. Quilt as desired. Then, trim the excess batting and plain fabric even with the pieced pillow front.








Quilt Pillow Top and trim excess batting and backing even with the pillow front.

- 7. From the pillow backing fabric, cut (2) 22 ½" x 15 ½" pieces of fabric to prepare for envelope pillow back assembly.
- **8.** Along the longest edge of both pillow back pieces, make a ¼" fold with the fold wrong sides together. Press the fold down thoroughly. Then make a fold of the same size along the same edge of pillow back pieces, and press again. This will conceal the raw edges of both pillow back pieces present at the envelope pillow back opening.
- **9.** Use your sewing machine to stitch along the folds on both pillow back pieces to secure. Stitch along the top of the fold and at the bottom of the fold if desired. Backstitch at the beginning and end of each seam.

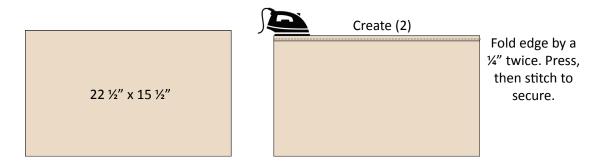

- **10.** Place the quilted pillow front onto your workstation wrong side up. Then, place one of the prepared pillow back pieces right side up onto the quilted pillow front. Align the raw edges. The fold should be offset from the center of the quilted pillow front.
- **11.** Then, place the remaining prepared pillow back piece right side up and raw edges aligned onto the other side of the quilted pillow front. The pillow back pieces should overlap creating the envelope pillow back. Both pillow back pieces should be right sides up.
- **12.** Pin the layers together, and sew around the edge using a ¼" seam to secure layers together.
- **13.** Bind the completed pillow using your preferred method and (3) 2 ¼" x WOF **Fabric C** strips. Insert the pillow form, and enjoy!

